

3P to 5P



# Receptacles-Dual Keyway

## Back Panel Mount

#18 AWG PVC 1 meter leads – automotive color code, epoxy potted  
 Gray anodized aluminum shell  
 Easy installation and keyway orientation

	2P	3P	4P	5P
FEMALE FACE VIEW				
COLOR CODE	1- brown 2- blue	1- green - gnd 2- red - black trace 3- red - white trace	1- red - black trace 3- red 2- red - white trace 4- green - gnd	1- red - white trace 4- red - yellow trace 2- red 5- red - black trace 3- green-gnd
VOLTAGE	250V AC/DC	250V AC/DC	250V AC/DC	250V AC/DC
CURRENT	4A	4A	4A	4A
CONDUCTOR	#18-2	#18-3	#18-4	#18-5

FEMALE	FIG	RECEPTACLES WITH #18 AWG PVC LEADS 1 METER LONG			
BACK PANEL AMOUNT	1	7R2B00A17M010	7R3B00A17M010	7R4B00A17M010	7R5B00A17M010

### CATALOG OPTIONS

Use the following chart to modify your part's specifications

**7R2B00A17M010**

**LEAD LENGTH**

2 METER	020
3 METER	030

# Specifications



**MECHANICAL**

SHELL: GRAY ANODIZED ALUMINUM  
 INSERT: NYLON 6/6  
 O-RING: NITRILE RUBBER  
 GASKET: NITRILE RUBBER  
 CONDUCTOR: #18 AWG WITH PVC INSULATION  
 OVER 16 X #30 COPPER STRANDING,  
 300V, UL STYLE 1061, CSA AWM SR

**ELECTRICAL**

VOLTAGE RATING: 250V AC/DC  
 AMPERAGE: 2P - 4A  
 3P - 4A  
 4P - 4A  
 5P - 4A

**ENVIRONMENTAL**

PROTECTION: IP 65, NEMA 4  
 AMBIENT OPERATING TEMP: -4° TO 176° F (-20° TO 80° C)

**CERTIFICATIONS**

UL: UL LISTED, FILE NO. E152210  
 CSA: CSA CERTIFIED, FILE NO LR6837

## RECEPTACLE DIMENSIONS

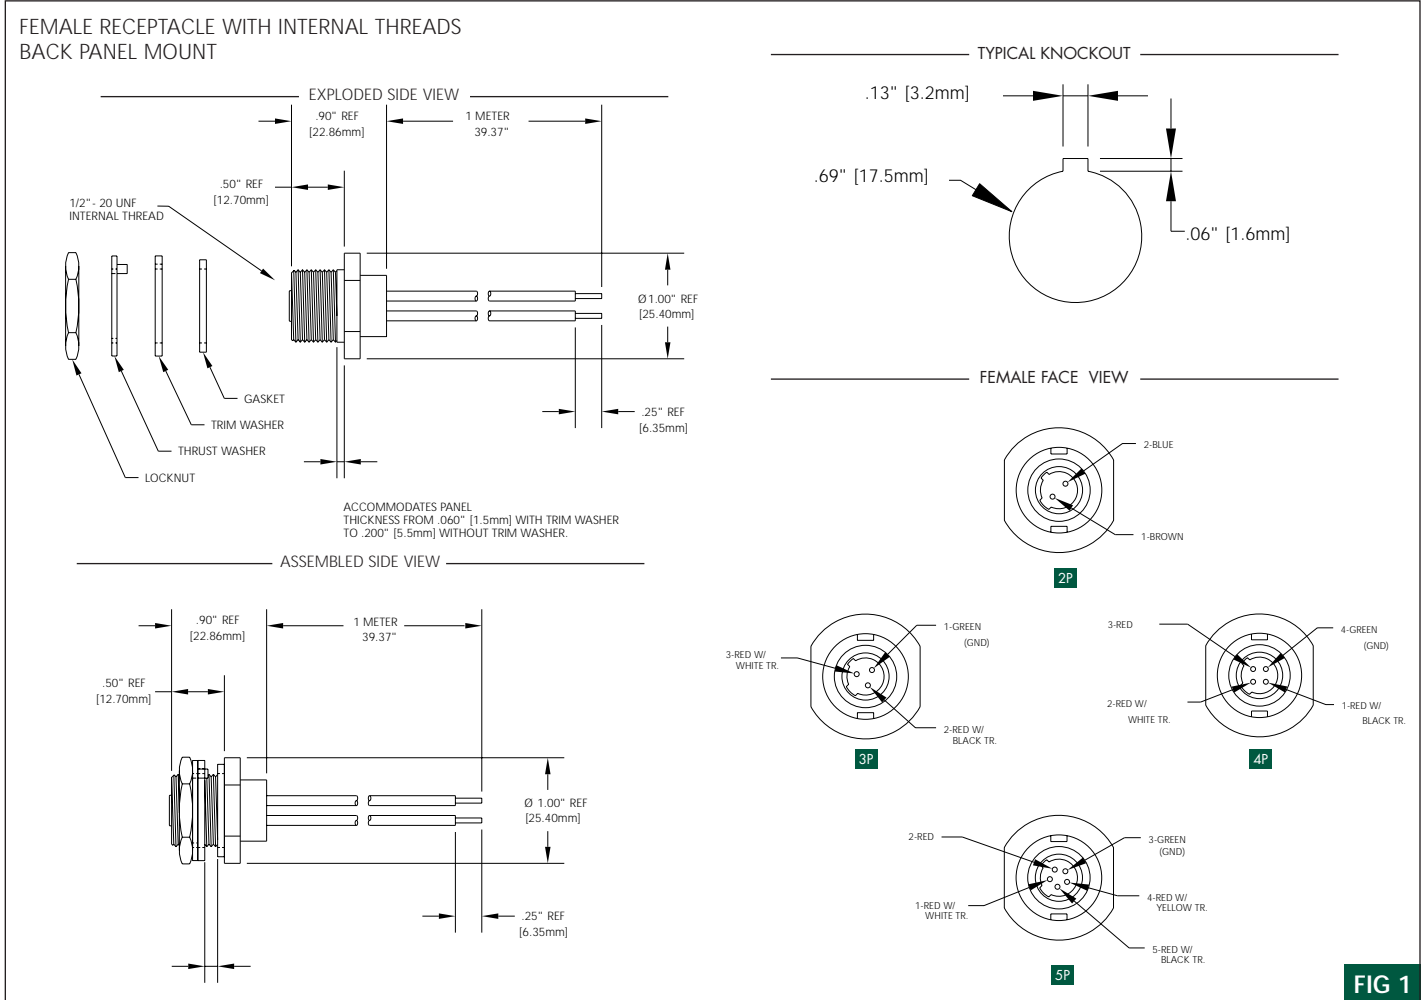


FIG 1